

# GLASS INTERIORS

INNOVATIVE GLAZING SYSTEMS


TG90 SPECIFICATION 2021 / 2022

# TG90

DOUBLE GLAZED | 55dB



BASE DETAIL

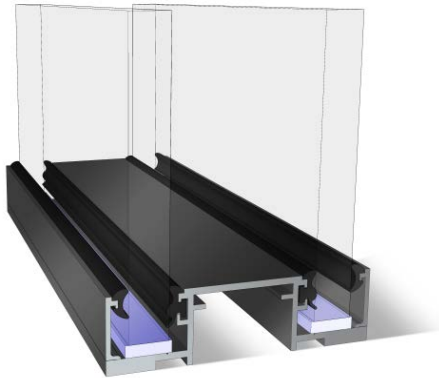

HEAD DETAIL



DEFLECTION HEAD DETAIL



## Overview

Fully demountable and re-locatable glass partitioning system that re-uses glass and framing components. Dribond® double glazed partitioning system in standard format gives 55db rating which can be further enhanced using thicker glass in difference combinations, also the use of acoustic laminated glass ranging from 6mm to 16.8mm can be accepted into the glazing pockets. The unique glazing frame sections also provide a further glazing pocket allowing for triple glazing and extremely high levels of acoustic insulation.

## System Specification

Head Channel	DRiDG2 - 90 x 25
Deflection Head Channel	DRiDG1 - 90 x 45
Base Channel	DRiDG3 - 90 x 25
Wall Abutment	DRiDG1 - 90 x 25
Base Clip in	DRICF4 (2no) - 25
Gasket	Acoustic (Clear / Black)
Toughened Glass	10mm / 12mm / 15mm
Acoustic Glass	10.8mm / 12.8mm / 16.8mm
Toughened / Laminated Glass	13.5mm / 17.5mm
Joint Type	Dribond Joint
Finish	PPC / Anodised

Acoustic Rating	up to 55dB (Rw)
Fire Rating	N/A
Line Load	up to 1.5kN p/m



TG90

DOUBLE GLAZED | IMAGES

